

4200

PORTABLE BALER/LOGGER

POWER

PORTABLE UNIT

• CUMMINS 6 CYLINDER TURBO DIESEL 175 HP TIER IV

STATIONARY UNIT

• 60 HP ELECTRIC MOTOR

FEATURES

- BALE EJECT
- MANUAL & AUTOMATIC BALING AND LOGGING CYCLES
- AIR-CONDITIONED CAB
- HARDOX LINERS


CYLINDER FORCES

- MAIN COMPRESSION, 165 TONS
- FOLDING BOX, 118 AND 176 TONS

BALER HYYDRAULIC

- 1 REXROTH VARIABLE DISPLACEMENT PISTON PUMP
- 1 VANE TYPE PUMP
- MAXIMUM OPERATING PRESSURE OF 4350 PSI
- 100% FILTRATION WITH 10 MICRON FIBERS
- COMPLETE SYSTEM RELIEF PROTECTION
- HYDRAULIC COOLING SYSTEM



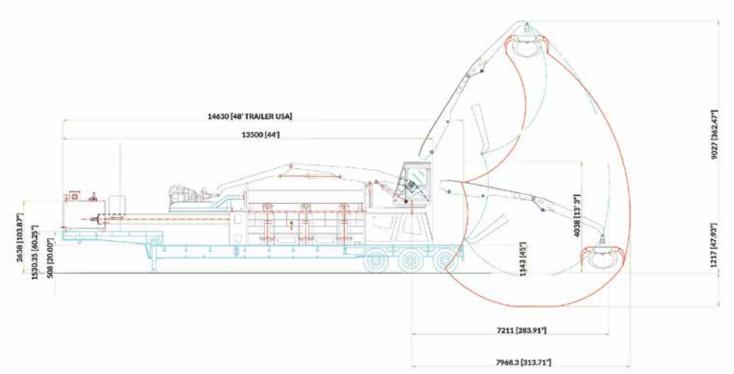

OPTIONAL CRANE

- FULL FUNCTIONING, INDEPENDENT OF BALER
- CONTINUOUS ROTATION
- 4400 LBS. CAPACITY FULLY EXTENDED
- 24' 8" BOOM REACH
- FOUR POINT ORANGE PEEL GRAPPLE ON X WITH ROTATOR

Note: Performance rates, bale weights and bale densities are subject to material pre-bale densities, feed rates and other variables in baling. Individual results may vary.

FOLDING BOX DIMENSIONS

OPEN: 13'10" L X 6'8" W

CLOSED: 13'10" L X 24" W X 20" H

BALE & LOG DIMENSIONS.

SIZE

24" X 20" X VARIABLE

WEIGHT

BALES: 700-800 LBS. AVERAGE LOGS: 1000-1100 LBS. AVERAGE

PRODUCTION _

BALING: 8-12 TONS PER HOUR LOGGING: 9-14 TONS PER HOUR

TANK CAPACITIES

DIESEL TANK

80 GALLONS

HYDRAULIC TANK

300 GALLONS

APPROX WEIGHT -

STATIONARY: 48,400 LB

PORTABLE WITH CRANE: 76,000 LB PORTABLE WITHOUT CRANE: 64,400 LB

SEE MORE PHOTOS, SPECS, AND INFO AT SIERRAINTL.COM

> *Sierra reserves the right to change specifications without notice. Rev. September 2020

